






Rake Rail Jig Instructions



1 1/2 " Baluster guide. Bolt on top right and bottom left

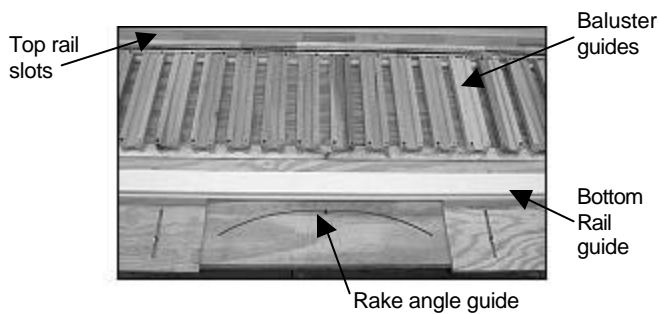

1 1/4" Baluster guide. Bolt on top left and bottom right



Insure baluster guides (18 total) are correct. You must flip guides to change from 1 1/2" to 1 1/4". See pictures on right for correct setup.

Straight Run



Determine center point and adjust top insert and bottom rail in jig.



Cut balusters to desired length. Place top insert and bottom rail. Adjust bottom rail guide.



Insert 18 balusters (8' section) less for shorter section.



Screw top insert and bottom rail to balusters with 36 2 1/2" galvanized deck screws.

Rake



Set degree of rake. Push right for 1 1/2" baluster and push left for 1 1/4" balusters



Pre-cut baluster to desired length and desired angle.



Place top insert and bottom rail on jig and adjust. Place balusters.



Determine center point and adjust top insert and bottom rail in jig.



Screw top insert and bottom rail to balusters with 36 2 1/2" galvanized deck screws.