Square PermaLite Column®

# 12"x12"x6'-0" Plain

Tuscan Cap/Base Set

**SKU:** Col.-80121206SP Cap/Base-8048121202

**Product Material:** Col-Fiberglass/Tuscan-SIM

## Notes

- Tolerances: +/- 1/4" in all dimensions
- Whole columns must have 75% contact at the top and 100% contact at the bottom. For split columns, leave a 1/2" - 1" gap between the top of the column and the header. See Installation Instructions.
- Column must be primed and painted after installation on jobsite. If column is not primed and painted it will turn a yellowish color due to UV rays. DO NOT paint columns using dark colors (dark colors are considered any color that falls within the L values of 56 to 0). Follow paint manufacturer's instructions for priming and finishing of fiberglass composite column and polyurethane cap and base.
- 12" square PermaLite column has an eccentric; average allowable load of 3,000 lbs & a concentric load bearing capacity of 7,500 lbs max.
- Top and bottom of column is attached to header and substrate with 'L' brackets with the exception of ornamental capitals. See installation instructions for guidance on ornamental capitals.
- Column inside dimension: 10-5/8"
- Columns are not intended to be used in a free standing application without the use of a tie down system.

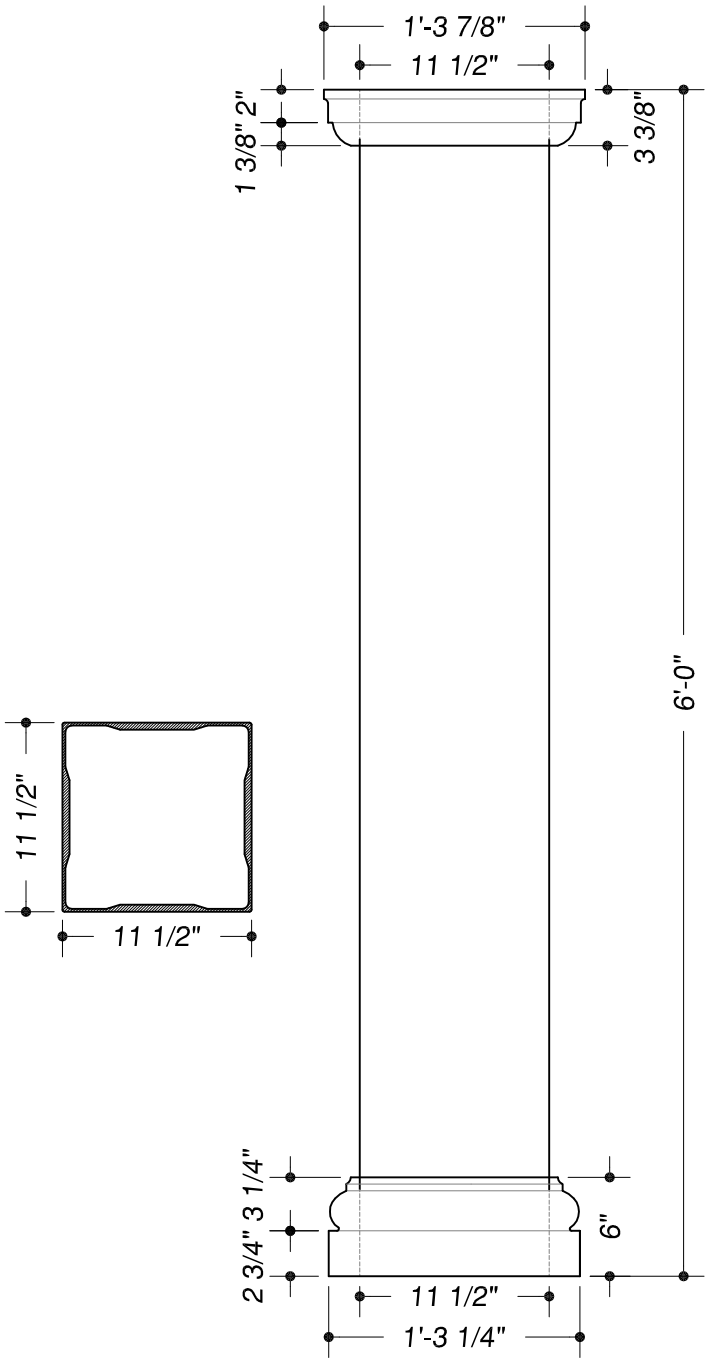


| | | |
|---|---|---|
| Drawn by: | CAG | |
| Date: | 8 May 2019 | |
| Scale: | NTS | 12x12x6-80121206SP |


HB&G Building Products

1015 Brundidge Blvd.
P.O. Box 589
Troy, Alabama 36081
334.566.5000
Fax 334.566.4626
www.hbgcolumns.com


©2018 HB&G Building Products, Inc.