6" Balustrade System

3-3/8" Shelby

Baluster

SKU: 58033

Product Material: Polyurethane/cPVC

Notes

- The Shelby balusters are produced using EMT surrounded with a high density polyurethane filler
- All balustrade parts come primed and ready to paint from the factory.
- Balusters are connected to top & bottom rails by drilling holes into the top & bottom rails and inserting the galvanized pipe through. See Installation Instructions.
- Shelby Baluster length & on center dimension:
58033 - 24" - 5-1/2" O.C. Max
58034 - 26-1/2" - 5-1/2" O.C. Max
58035 - 32-7/8" - 5-1/2" O.C. Max
- Balusters have 3/4" EMT pipe inside for sturctural stability.
- HB&G is not responsible for any balustrade system that does not meet the requirements of the governing building code in the location where the system is installed.
- All balustrade parts come primed and ready to paint from the factory.
- Balustrade is attached to a structural newel, column, or wall using our installation kits. Rail must be attached to a structural newel, column, or wall. See Installation Instructions.
- HB&G is not responsible for any balustrade system that does not meet the requirements of the governing building code in the location where the system is installed.
- Balustrade must be primed and painted after installation on jobsite. If balustrade is not primed and painted it will turn a yellowish color due to UV rays. DO NOT paint balustrade using dark colors (dark colors are considered any color that falls within the L values of 56 to 0). Follow paint manufacturer's instructions for priming and finishing.

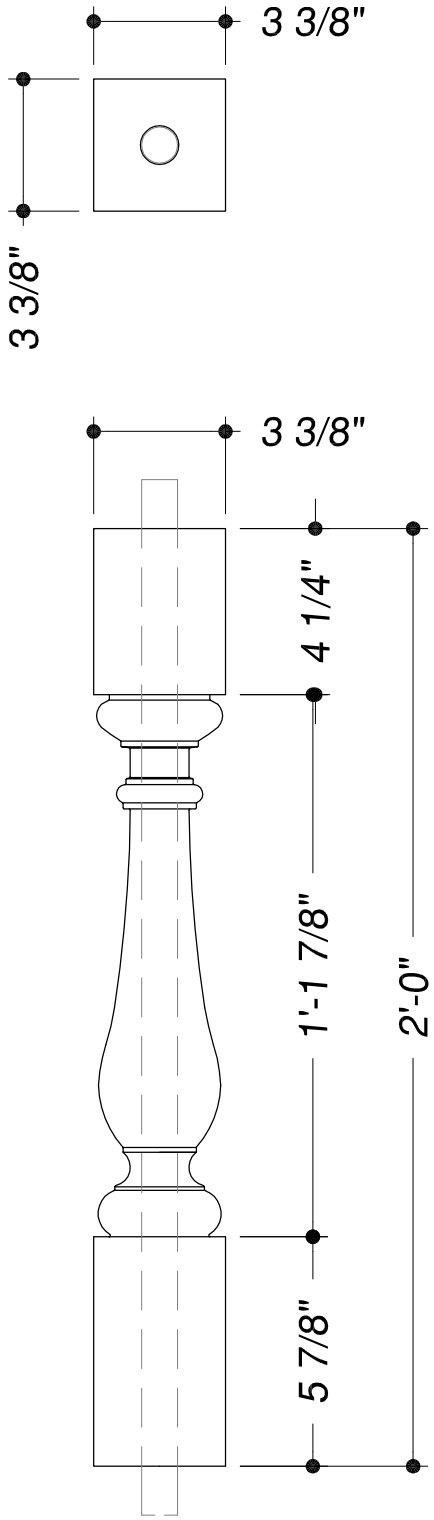

Drawn by:	CAG
Date:	15 May 2019
Scale:	NTS

HB&G Building Products
1015 Brundidge Blvd.
P.O. Box 589
Troy, Alabama 36081
334.566.5000
Fax 334.566.4626
www.hbgcolumns.com