6" Balustrade System

3" Square

Baluster

SKU: 58029

Product Material: Polyurethane/cPVC

Notes

- The square balusters are produced using EMT surrounded with a high density polyurethane filler
- All balustrade parts come primed and ready to paint from the factory.
- Balusters are connected to top & bottom rails by drilling holes into the top & bottom rails and inserting the galvanized pipe through. See Installation Instructions.
- Square Baluster length & on center dimension:
58029 - 26-1/2" - 7" O.C. Max
58030 - 32-1/8" - 7" O.C. Max
- Balusters have 3/4" EMT pipe inside for sturctural stability.
- The 6" balustrade system is produced using a PVC pipe surrounded by a high density polyurethane foam.
- Top & Bottom Rails come in lengths of 8'-0",10'-0", & 12'-0" lengths. A support block should be used every 4'-0" span.
- All balustrade parts come primed and ready to paint from the factory.
- Balustrade is attached to a structural newel, column, or wall using our installation kits. Rail must be attached to a structural newel, column, or wall. See Installation Instructions.
- Balustrade sections can NOT be connected end to end. Top & bottom rails must connect to a structural member.
- HB&G is not responsible for any balustrade system that does not meet the requirements of the governing building code in the location where the system is installed.
- Balustrade must be primed and painted after installation on jobsite. If balustrade is not primed and painted it will turn a yellowish color due to UV rays. DO NOT paint balustrade using dark colors (dark colors are considered any color that falls within the L values of 56 to 0). Follow paint manufacturer's instructions for priming and finishing.



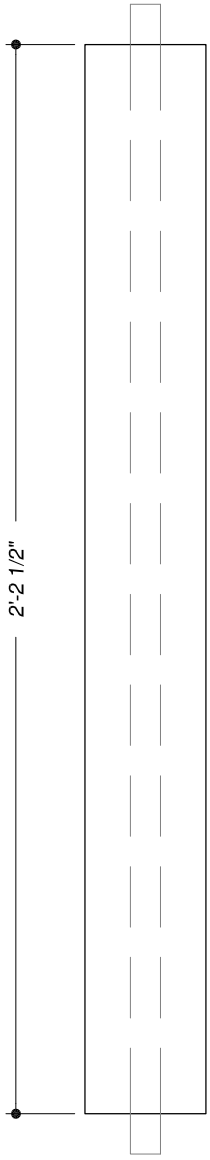

Drawn by: CAG
Date: 15 May 2019
Scale: NTS

HB&G Building Products
1015 Brundidge Blvd.
P.O. Box 589
Troy, Alabama 36081
334.566.5000
Fax 334.566.4626
www.hbgcolumns.com