7" Balustrade System

5-1/4" Carrington

Baluster

SKU: 58043

Product Material: Polyurethane/cPVC

Notes

- The Carrington balusters are produced using a galvanized steel pipe surrounded with a high density polyurethane filler.
- All balustrade parts come primed and ready to paint from the factory.
- Balusters are connected to top & bottom rails by drilling holes into the top & bottom rails and inserting the galvanized pipe through. See Installation Instructions.
- Carrington baluster lengths & on center dimensions:
58043 - 26" - 6-1/2" O.C. Max
58046 - 34" - 6-1/2" O.C. Max
58044 - 40" - 6-1/2" O.C. Max
- Balusters have a 2" galvanized pipe inside for structural stability.
- HB&G is not responsible for any balustrade system that does not meet the requirements of the governing building code in the location where the system is installed.
- The 7" balustrade system is produced using a PVC pipe surrounded by a high density polyurethane foam.
- Top & Bottom Rails come in lengths of 8'-0",10'-0", & 12'-0" lengths. A support block should be used every 4'-0" span.
- All balustrade parts come primed and ready to paint from the factory.
- Balustrade is attached to a structural newel, column, or wall using our installation kits. Rail must be attached to a structural newel, column, or wall. See Installation Instructions.
- Balustrade sections can NOT be connected end to end. Top & bottom rails must connect to a structural member.
- Rail Dimensions:
Top Rail: 7-1/4" wide x 5-1/2" high
Bottom Rail: 7-1/4" wide x 5-1/2" high

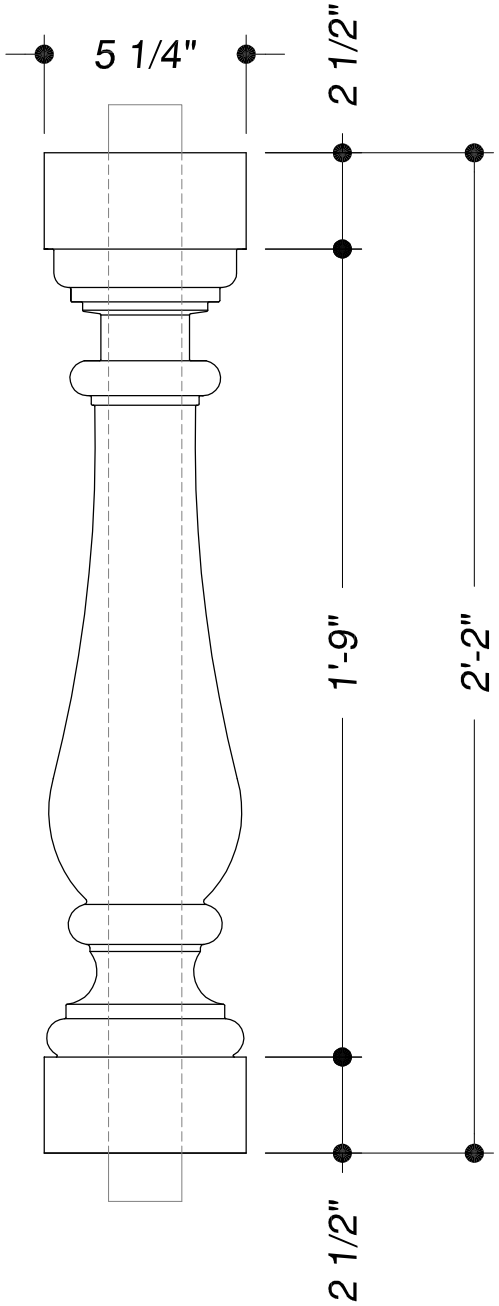

Drawn by: CAG
Date: 15 May 2019
Scale: NTS

HB&G Building Products
1015 Brundidge Blvd.
P.O. Box 589
Troy, Alabama 36081
334.566.5000
Fax 334.566.4626
www.hbgcolumns.com